

APPLICATION:		PRODUCT NAME:
		4" C/C BACKSPLASH FAUCET
JOB NAME:		SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS
QUANTITY:	ITEM NO.	MODEL:
 4" [101.6mm]		☐ 3610 W/6" SWING SPOUT
		☐ 3611 W/8" SWING SPOUT



MODEL	DIM "A"	DIM "B"	DIM "C"
3610	2"	5-3/8"	6"
	[50.8mm]	[136.5mm]	[152.4mm]
3611	2-1/4"	6"	8"
	[57.2mm]	[152.4mm]	[203.2mm]
3612	2-7/8"	6-1/2"	10"
	[73.0mm]	[165.1mm]	[254.0mm]
3613	3-1/8"	6-3/4"	12"
	[79.4mm]	[171.5mm]	[304.8mm]
3614	4-1/8"	7-3/4"	14"
	[104.8mm]	[196.9mm]	[355.6mm]
1783	4-7/8"	8-3/4"	16"
	[123.8mm]	[222.3mm]	[406.4mm]

ROUGH-IN:

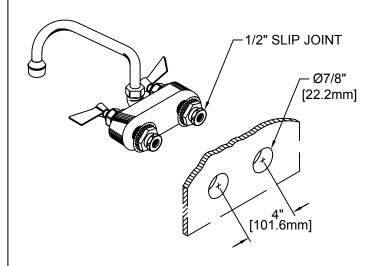

ANSI/A112.18.1M

	□ 3610	W/6" SWING SPOUT			
	□ 3611	W/8" SWING SPOUT			
	□ 3612	W/10" SWING SPOUT			
	□ 3613	W/12" SWING SPOUT			
	□ 3614	W/14" SWING SPOUT			
	□ 1783	W/16" SWING SPOUT			
OPTIONS OR MODIFICATIONS:					
☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH					
☐ DJ SUB-ASSY (7-1/4" OR 13") CIRCLE LENGTH					
	□ ELBOWS				
	☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE				
	☐ VANDAL RESISTANT KIT				
	□ OTHE	R			

FEATURES:

- * 4" C/C BACKSPLASH
- * SWIVELLING SEAT DISKS
- * HOT SIDE STEM RIGHT HAND
- * COLD SIDE STEM LEFT HAND
- * STAINLESS STEEL SEATS
- * STAINLESS STEEL SEAT SCREWS
- * STAINLESS STEEL HANDLE SCREWS
- * 1/2" SLIP JOINT

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE 200 PSI MAX. STATIC
- * 2.20 GPM AT 80 PSI

SHIPPING WEIGHT

* 4.25 LBS



TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com