

APPLICATION:

PRODUCT NAME:

SINGLE BACKSPLASH BASE

JOB NAME:

SPECIAL CONFIGURATION
 CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

MODEL:

3915 W/ 12" SWIVEL GOOSENECK SPOUT
 2038 W/ 6" SWIVEL GOOSENECK SPOUT

OPTIONS OR MODIFICATIONS:

SUPPLY LINES (24" OR 36") CIRCLE LENGTH
 NIPPLES
 ELBOWS
 HANDLES (CROSS OR WRIST) CIRCLE STYLE
 VANDAL RESISTANT KIT
 OTHER _____

FEATURES


* SINGLE BACKSPLASH

SYSTEM LIMITS

* TEMP: 40°F MIN. TO 140°F MAX.
 * PRESSURE 200 PSI MAX. STATIC
 * 2.20 GPM @ 60 PSI


SHIPPING WEIGHT

* 3.0 LBS

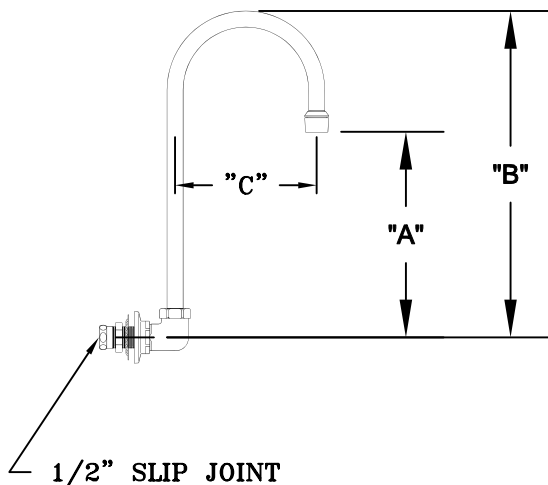

| MODEL | DIM "A" | DIM "B" | DIM "C" |
|-------|-----------------------|----------------------|---------------------|
| 3915 | 6-1/16" [154.0mm] | 10-1/8" [257.2mm] | 5-1/2" [139.7mm] |
| 2038 | 4-11/16" [119.1mm] | 7-1/8" [181.0mm] | 3-1/2" [88.90mm] |

ROUGH-IN:

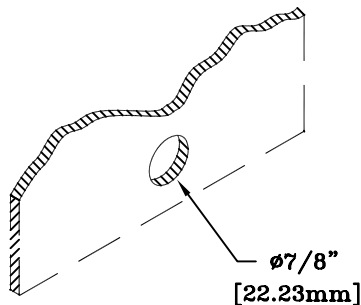

ANSI/A112.18.1M

FISHER

FISHER MANUFACTURING COMPANY
 TOLL FREE: 800-421-6162 - FAX: 800-832-8238
 information@fisher-mfg.com - www.fisher-mfg.com