

APPLICATION:

PRODUCT NAME:  
 SINGLE BACKSPLASH BASE


JOB NAME:

SPECIAL CONFIGURATION  
 CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

MODEL:  
 3916 W/ 12" RIGID GOOSENECK SPOUT  
 9131 W/ 6" RIGID GOOSENECK SPOUT

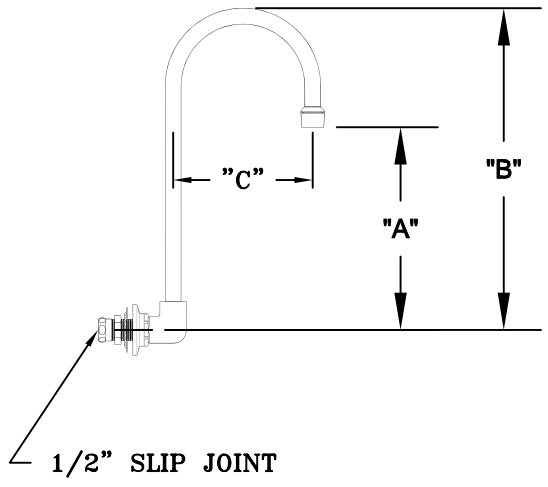

OPTIONS OR MODIFICATIONS:  
 SUPPLY LINES (24" OR 36") CIRCLE LENGTH  
 NIPPLES  
 ELBOWS  
 HANDLES (CROSS OR WRIST) CIRCLE STYLE  
 VANDAL RESISTANT KIT  
 OTHER \_\_\_\_\_

FEATURES

\* SINGLE BACKSPLASH

SYSTEM LIMITS

- \* TEMP: 40°F MIN. TO 140°F MAX.
- \* PRESSURE 200 PSI MAX. STATIC
- \* 2.20 GPM @ 60 PSI

MODEL	DIM "A"	DIM "B"	DIM "C"
3916	6-5/16" [154.0mm]	10-1/8" [257.2mm]	5-1/2" [139.7mm]
9131	4-11/16" [119.1mm]	7-1/8" [181.0mm]	3-1/2" [88.90mm]

SHIPPING WEIGHT

\* 3.0 LBS

ROUGH-IN:

