

APPLICATION:

PRODUCT NAME:  
UTILITY SPRAY HOSE ASSEMBLY

JOB NAME:

\_\_\_\_\_ SPECIAL CONFIGURATION  
 \_\_\_\_\_ CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

MODEL:  
 9158

OPTIONS OR MODIFICATIONS:  
 OTHER \_\_\_\_\_

**FEATURES**


- HOSE**
- \* 60" LENGTH
  - \* STAINLESS STEEL END FITTINGS
  - \* STAINLESS STEEL EXTERNAL JACKET
  - \* 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
  - \* REPAIRABLE IN-FIELD WITH SIMPLE TOOLS

- UTILITY SPRAY VALVE**
- \* NOZZLE THREADED INTO VALVE
  - \* BRONZE HANDLE - NOT PLASTIC - MEANS FULL "ON"
  - \* SHOWER SPRAY PATTERN
  - \* 45° ANGLED HEAD
  - \* FITS ALL BRANDS
  - \* 2.65 GPM AT 80 PSI


- DECK FLANGE**
- \* SOLID BRASS CONSTRUCTION
  - \* INTERNAL TAPER TO ALLOW VALVE TO STAND UP

- SYSTEM LIMITS**
- \* TEMP: 40°F MIN. TO 140°F MAX.
  - \* PRESSURE: 200 PSI MAX. STATIC

- SHIPPING WEIGHT**
- \* 5.0 LBS

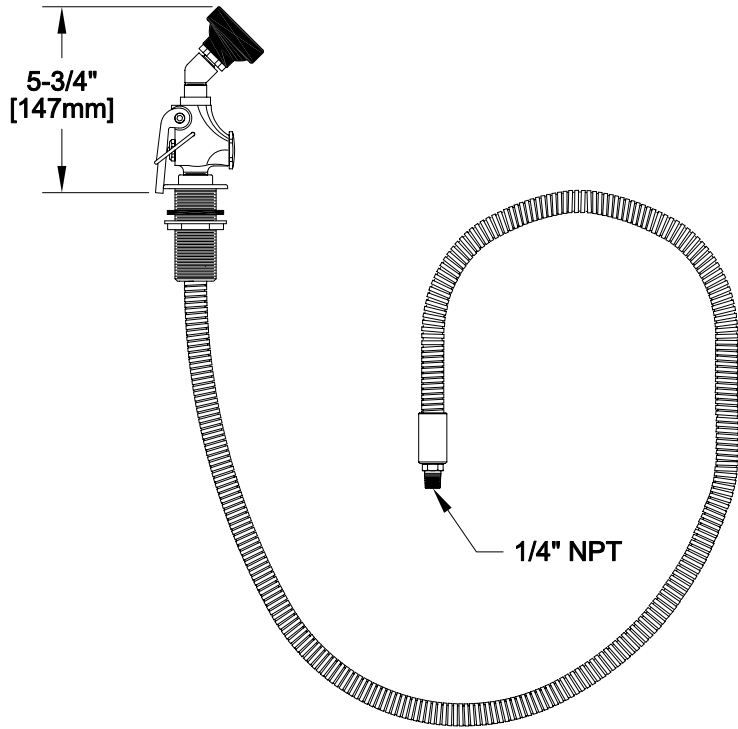

ROUGH-IN:



FISHER MANUFACTURING COMPANY  
TOLL FREE: 800-421-6162 - FAX: 800-832-8238  
information@fisher-mfg.com - www.fisher-mfg.com