


APPLICATION:  
 JOB NAME:  
 QUANTITY:                      ITEM NO.

PRODUCT NAME:  
 CONTROL VLV 8" BS W/GOOSENECK SPOUT

SPECIAL CONFIGURATION  
 CHECK BASE MODEL AND OPTIONS

MODEL:  
 13285 W/12" SWIVEL GOOSENECK SPOUT  
 13226 W/12" SWIVEL GOOSENECK SPOUT

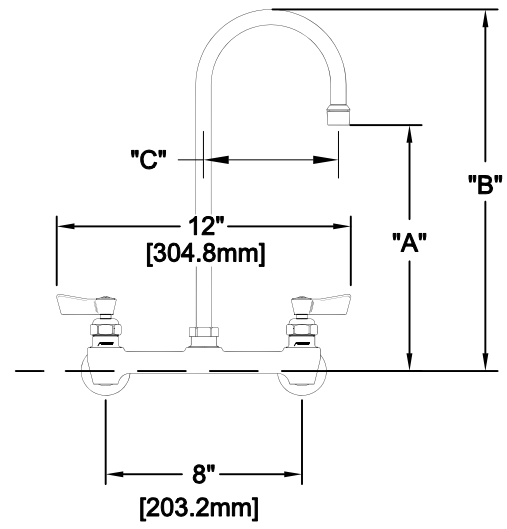

| MODEL | DIM "A"             | DIM "B"              | DIM "C"             |
|-------|---------------------|----------------------|---------------------|
| 13285 | 8-1/4"<br>[209.6mm] | 12-1/4"<br>[311.2mm] | 5-1/2"<br>[139.7mm] |
| 13226 | 4-1/2"<br>[114.3mm] | 8-1/16"<br>[204.8mm] | 3-1/2"<br>[88.90mm] |

OPTIONS OR MODIFICATIONS:  
 SUPPLY LINES (24" OR 36") CIRCLE LENGTH  
 NIPPLES  
 ELBOWS  
 HANDLES (CROSS OR WRIST) CIRCLE STYLE  
 VANDAL RESISTANT KIT  
 OTHER \_\_\_\_\_

FEATURES:

CONTROL VALVE  
 \* 8" C/C BACKSPLASH  
 \* SWIVELLING SEAT DISKS  
 \* HOT SIDE STEM - RIGHT HAND, COLD - LEFT HAND  
 \* STAINLESS STEEL SEATS  
 \* STAINLESS STEEL SEAT SCREWS  
 \* STAINLESS STEEL HANDLE SCREWS

RECOMMENDED SETTINGS  
 \* 110°F AT 80 PSI

SYSTEM LIMITS  
 \* TEMP: 40°F MIN. TO 140°F MAX.  
 \* PRESSURE 200 PSI MAX. STATIC

FLOW RATE  
 \* 2.2 GPM

SHIPPING WEIGHT  
 \* 5.0 LBS

ROUGH-IN:

