

APPLICATION:		WALL MOUNTED REEL RINSE	SPEC. 28
OB NAME:		SPECIAL CONFIGURATION (CHECK BASE MODEL AND ORTIONS)	231
QUANTITY:	ITEM NO.:	(CHECK BASE MODEL AND OPTIONS) MODEL:	REV.

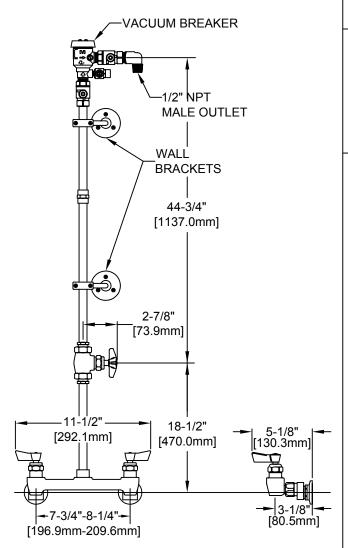

ROUGH-IN:

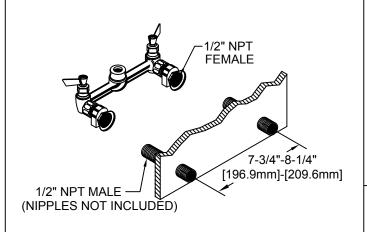

(f) ANSI/A112.18.1M

☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE

OPTIONS OR MODIFICATIONS:

FEATURES:

□ OTHER __

WALL CONTROL VALVE

□ 28231

* ECCENTRICS ADJUST FROM 7-1/2" TO 8-1/2"

□ SUPPLY LINES (24" OR 36") CIRCLE LENGTH

Œ

- * INTERNAL SPRING LOADED CHECK VALVES
- * SWIVELING SEAT DISKS
- * HOT SIDE STEM RIGHT HAND
- * COLD SIDE STEM LEFT HAND
- * STAINLESS STEEL SEATS
- * STAINLESS STEEL SEAT SCREWS
- * STAINLESS STEEL HANDLE SCREWS

RISER CONTROL VALVE

- * RIGHT HAND SWIVEL STEM WITH CROSS HANDLE
- * STAINLESS STEEL SEAT
- * STAINLESS STEEL SEAT SCREW
- * STAINLESS STEEL HANDLE SCREW

VACUUM BREAKER

- * ANTI-SPILL DESIGN
- * ASSE 1056 APPROVED

WALL BRACKET

* ADJUSTS FROM 2" TO 12"

SYSTEM LIMITS

- * TEMP: 40°F TO 140°F MAX.
- * PRESSURE 200 PSI MAX. STATIC

SHIPPING WEIGHT

* 15.0 LBS



FISHER MANUFACTURING COMPANY
TOLL FREE: 800-421-6162 - FAX: 800-832-8238
information@fisher-mfg.com - www.fisher-mfg.com