

APPLICATION:

PRODUCT NAME:

SDDC POT FILLER HOSE STYLE  
WITH VACUUM BREAKER

JOB NAME:

\_\_\_\_\_ SPECIAL CONFIGURATION  
CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

MODEL:

2140 WITH WALL HOOK

OPTIONS OR MODIFICATIONS:

- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
- ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE
- IN-LINE DUAL CHECK VALVE
- PIPE HOOK
- HANDLES (CROSS OR WRIST) CIRCLE STYLE
- VANDAL RESISTANT KIT
- OTHER \_\_\_\_\_

FEATURES

CONTROL VALVE

- \* SINGLE DECK DUAL CONTROL
- \* INTERNAL SPRING LOADED CHECK VALVES
- \* HOT SIDE STEM - RIGHT HAND
- \* COLD SIDE STEM - LEFT HAND
- \* SWIVELLING SEAT DISKS
- \* STAINLESS STEEL SEATS
- \* STAINLESS STEEL SEAT SCREWS
- \* STAINLESS STEEL HANDLE SCREWS
- \* FLEXIBLE INLET HOSES

HOSE

- \* 60" LENGTH
- \* STAINLESS STEEL END FITTINGS
- \* STAINLESS STEEL EXTERNAL JACKET
- \* USDA APPROVED FOODGRADE INTERNAL RUBBER HOSE

POT FILLER VALVE

- \* NO-MARRING TUBE
- \* AERATED STREAM
- \* 5.0 GPM AT 80 PSI

SWIVEL ELBOW


- \* 360° TURNING RADIUS
- \* ATMOSPHERIC VACUUM BREAKER

SYSTEM LIMITS


- \* TEMP: 40°F MIN. TO 140°F MAX.
- \* PRESSURE: 200 PSI MAX. STATIC

SHIPPING WEIGHT

- \* 9.0 LBS

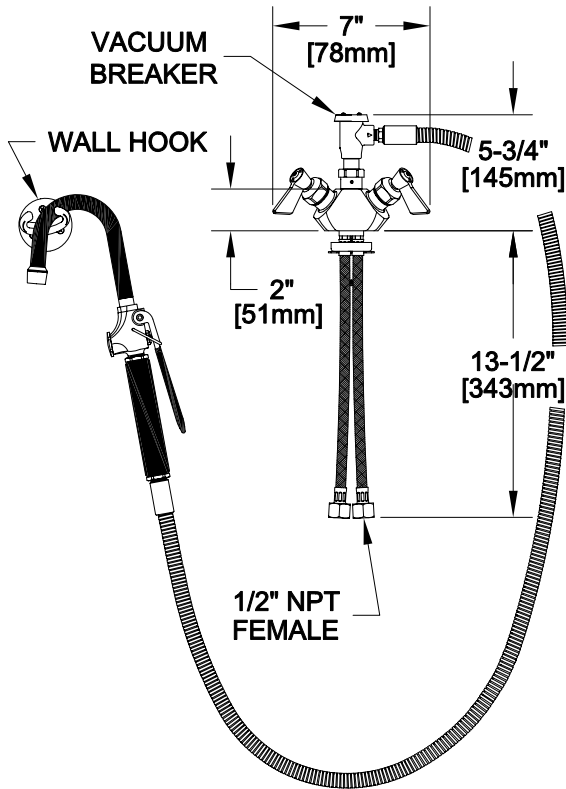

FOOTPRINT:

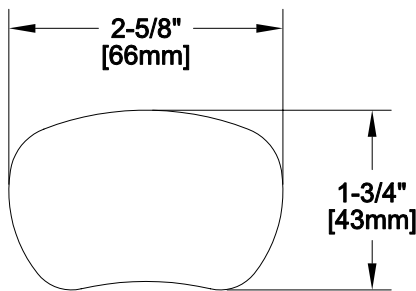

ROUGH-IN:

