
JOB NAME:

#14443 - VACUUM BREAKER


APPLICATION:

QUANTITY:

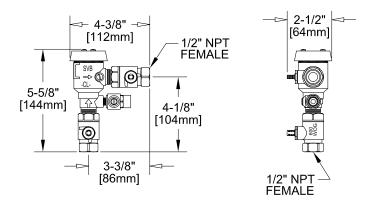


ITEM NO.


#17639 - CONTROL VALVE

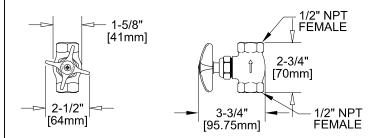

#2936-9000 - CHECK VALVE



RECOMMENDED LAYOUT**

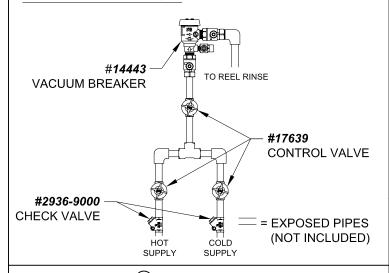

B ANSI/A112.18.1M

MODEL:

29475

OPTIONS OR MODIFICATIONS:

☐ OTHER

FEATURES

KIT INCLUDES THE FOLLOWING #14443 - VACUUM BREAKER (QTY: 1) #2936-9000 - CHECK VALVE (QTY: 2)

VACUUM BREAKER

- * ANTI-SPILL DESIGN
- * ASSE 1056 APPROVED

CONTROL VALVE

- * INTERNAL SPRING LOADED CHECK VALVES
- * SWIVELLING SEAT DISKS
- * RIGHT HAND SWIVEL STEM WITH CROSS HANDLES
- * STAINLESS STEEL SEATS
- * STAINLESS STEEL SEAT SCREWS
- * STAINLESS STEEL HANDLE SCREWS
- * BLUE AND RED INDEX BUTTONS INCLUDED

CHECK VALVE

- * BRASS BODY
- * ALLOWS FLUID FLOW IN 1 DIRECTION ONLY

SYSTEM LIMITS

- TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE: 150 PSI MAX STATIC

SHIPPING WEIGHT

- * 7.5 LBS
- ** PIPES, ELBOWS AND TEES NOT INCLUDED

FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com