

APPLICATION:

PRODUCT NAME:  
**POT FILLER HOSE STYLE  
 SINGLE DECK DUAL CONTROL**


JOB NAME:

\_\_\_\_\_ SPECIAL CONFIGURATION  
 (CHECK BASE MODEL AND OPTIONS)  
 MODEL:  
 2150

QUANTITY:

ITEM NO.:

OPTIONS OR MODIFICATIONS:  
 SUPPLY LINES (24" OR 36") CIRCLE LENGTH  
 ADD-ON FAUCET (6",8",10",12",14",16") CIRCLE LGTH  
 BACKFLOW PREVENTER  
 PIPE HOOK  
 VANDAL RESISTANT KIT  
 HANDLES (CROSS OR WRIST) CIRCLE STYLE  
 OTHER \_\_\_\_\_

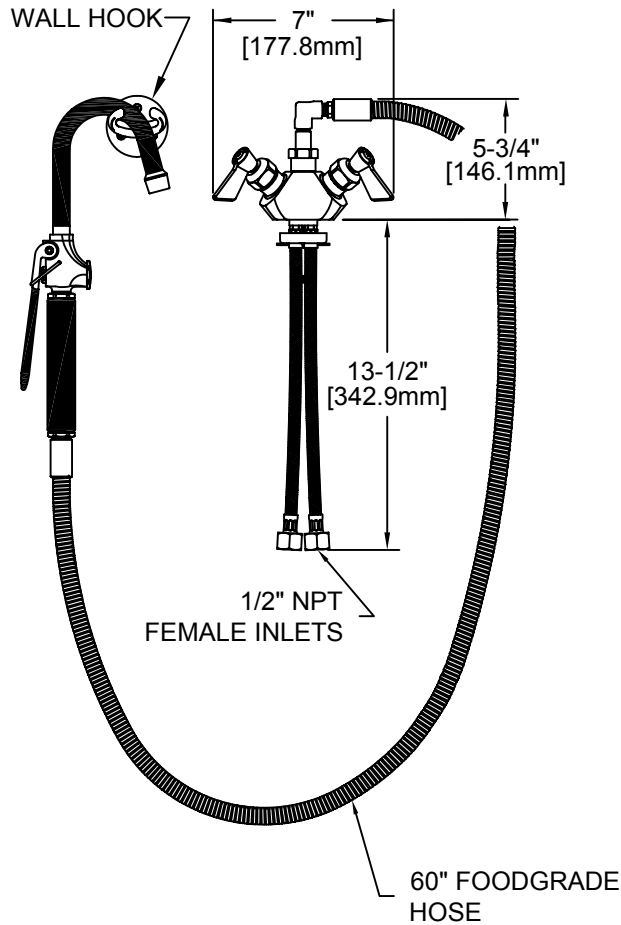

FEATURES:

**CONTROL VALVE**  
 \* SINGLE DECK DUAL CONTROL  
 \* INTERNAL SPRING LOADED CHECK VALVES  
 \* SWIVELING SEAT DISKS  
 \* HOT SIDE STEM - RIGHT HAND  
 \* COLD SIDE STEM - LEFT HAND  
 \* STAINLESS STEEL SEATS  
 \* STAINLESS STEEL SEAT SCREWS  
 \* STAINLESS STEEL HANDLE SCREWS  
 \* STAINLESS STEEL BRAIDED INLET HOSES

**HOSE**  
 \* 60" LENGTH  
 \* STAINLESS STEEL END FITTINGS  
 \* STAINLESS STEEL EXTERNAL JACKET  
 \* BRAIDED USDA APPROVED FOODGRADE INTERNAL HOSE


**POT FILLER VALVE**  
 \* NON SCRATCHING/ MARRING TUBE  
 \* 5.00 GPM AT 80 PSI  
 \* AERATED STREAM

**SWIVEL ELBOW**  
 \* 360° TURNING RADIUS

**SYSTEM LIMITS**  
 \* TEMP: 40°F MIN. TO 140°F MAX.  
 \* PRESSURE 200 PSI MAX. STATIC

**SHIPPING WEIGHT**  
 \* 9.0 LBS

FOOTPRINT:

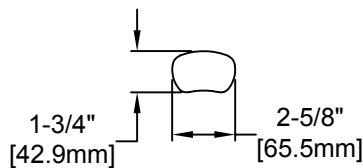

ROUGH-IN:

