


APPLICATION:  
 JOB NAME:  
 QUANTITY:                      ITEM NO.

PRODUCT NAME:  
 PRE-RINSE SPRING STYLE SINGLE DECK  
 WITH WALL BRACKET & ADD-ON FAUCET

\_\_\_\_\_ SPECIAL CONFIGURATION  
 CHECK BASE MODEL AND OPTIONS

MODEL:  
 34096 WITH 6" SWING SPOUT  
 34118 WITH 8" SWING SPOUT  
 34126 WITH 10" SWING SPOUT  
 34134 WITH 12" SWING SPOUT  
 34142 WITH 14" SWING SPOUT  
 34150 WITH 16" SWING SPOUT

OPTIONS OR MODIFICATIONS:  
 SUPPLY LINES (24" OR 36") CIRCLE LENGTH  
 ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE  
 IN-LINE DUAL CHECK VALVE  
 BRUSH  
 VANDAL RESISTANT KIT  
 HANDLES (CROSS OR WRIST) CIRCLE STYLE  
 OTHER \_\_\_\_\_

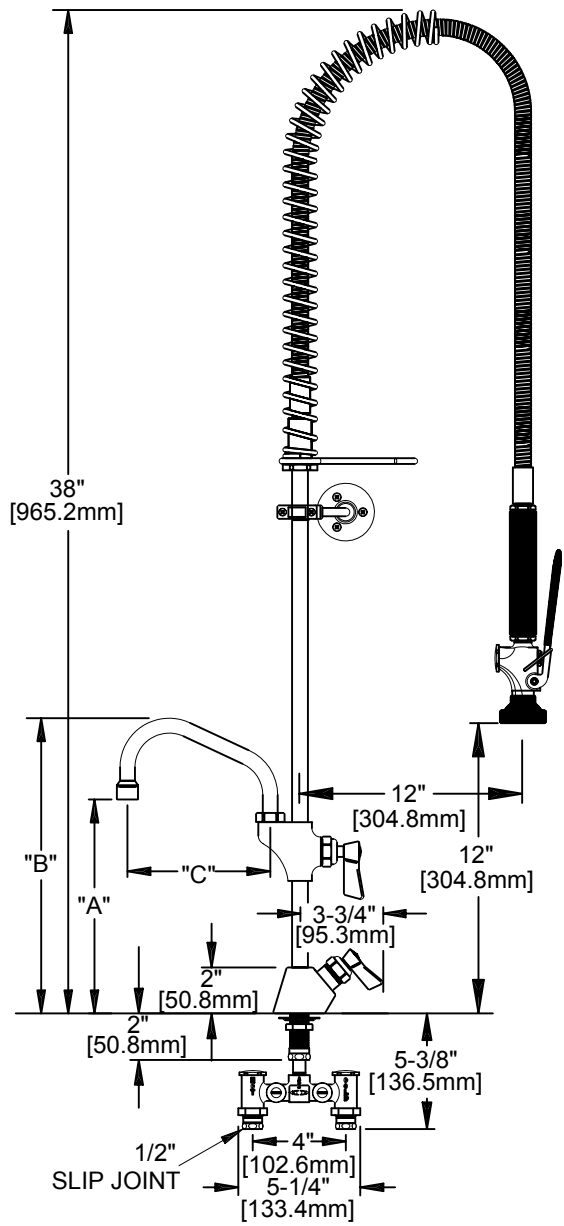

FEATURES:  
 MAIN CONTROL VALVE  
 \* SINGLE DECK  
 \* STEM - LEFT HAND SWIVEL  
 \* HOT & COLD INDED BUTTONS  
 \* SWIVELLING SEAT DISKS  
 \* STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS

TEMPERATURE CONTROL VALVE  
 \* INTERNAL CHECK VALVES  
 \* SCREWDRIVER ADJUSTMENT BOTH HOT & COLD

ADD-ON CONTROL VALVE  
 \* STEM - RIGHT HAND SWIVEL  
 \* HOT INDEX BUTTON  
 \* SWIVELLING SEAT DISKS  
 \* STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS.

HOSE  
 \* 36" LENGTH  
 \* STAINLESS STEEL END FITTINGS  
 \* STAINLESS STEEL EXTERNAL JACKET  
 \* 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE  
 \* REPAIRABLE IN FIELD WITH SIMPLE TOOLS

ULTRA SPRAY VALVE  
 \* LOWEST ENERGY USER - 1.15 GPM @ 60 PSI  
 \* CLEANS FASTER - TEST PROVEN  
 \* ENGINEERED TO LAST - NO 'O' RINGS TO LEAK  
 \* INTERCHANGEABLE - FITS ALL BRANDS

WALL BRACKET  
 \* ADJUSTS FROM 2" TO 12"

SYSTEM LIMITS  
 \* TEMP: 40°F MIN. TO 140°F MAX. STATIC  
 \* PRESSURE 200 PSI MAX. STATIC  
 \* SHIPPING WEIGHT: 14.0 LBS

ROUGH-IN	MODEL	DIM "A"	DIM "B"	DIM "C"
	34096	8-3/4" [221.3mm]	12-3/8" [313.3mm]	6" [152.4mm]
	34118	9" [227.6mm]	12-7/8" [326.0mm]	8" [203.2mm]
	34126	9-5/8" [243.5mm]	13-3/8" [340.3mm]	10" [254.0mm]
	34134	10-1/4" [259.4mm]	13-7/8" [351.4mm]	12" [304.8mm]
	34142	10-7/8" [275.2mm]	14-3/4" [373.7mm]	14" [355.6mm]
	34150	11-5/8" [294.3mm]	15-3/8" [389.5mm]	16" [406.4mm]