


APPLICATION: **PRODUCT NAME:**
WALL MOUNT POT FILLER HOSE STYLE

JOB NAME: **SPECIAL CONFIGURATION**
(CHECK BASE MODEL AND OPTIONS)

QUANTITY:ITEM NO. **MODEL:**
■ 2240

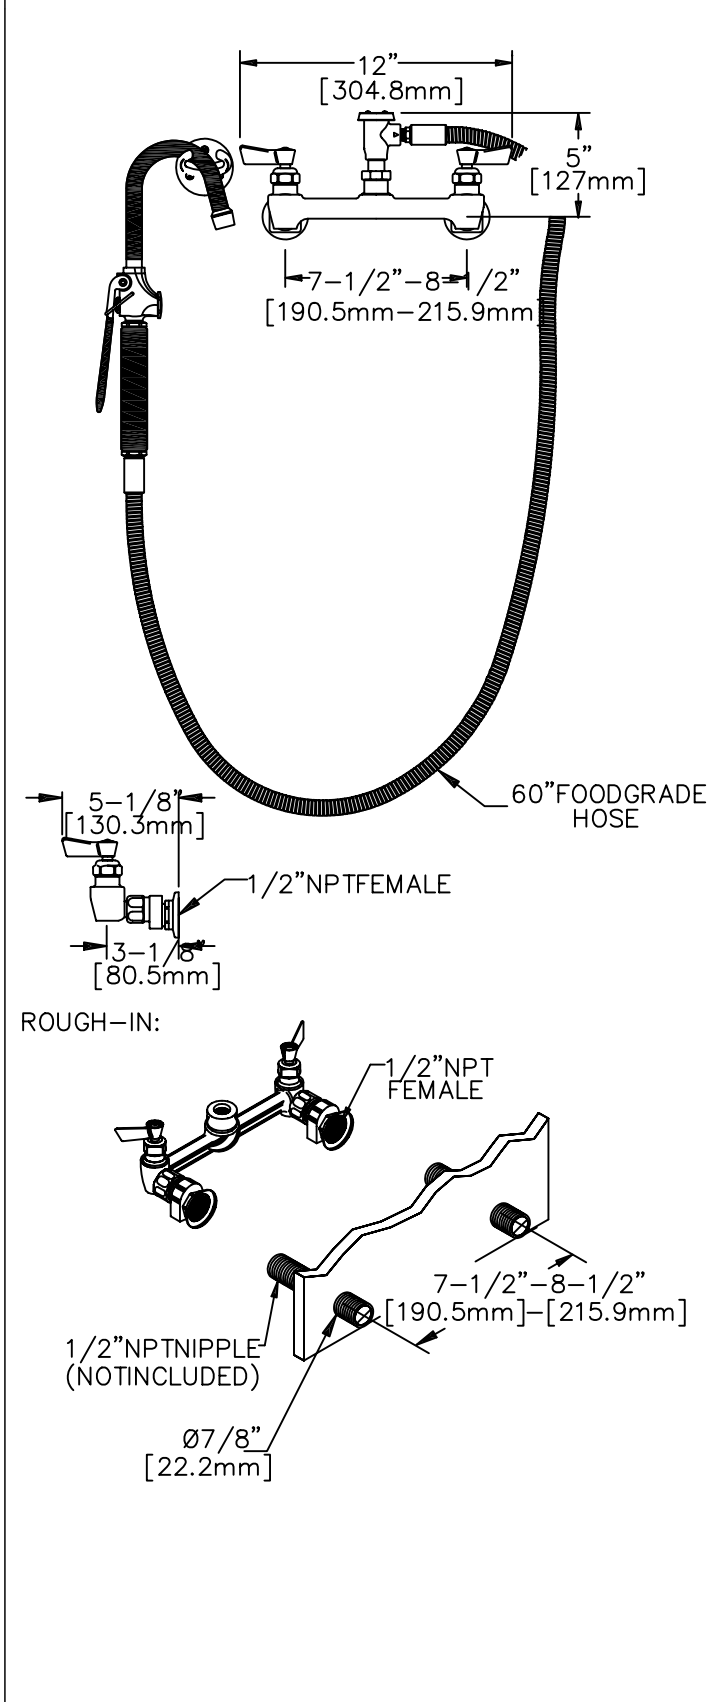

- OPTIONS OR MODIFICATIONS**
- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
 - ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE
 - BACKFLOW PREVENTER
 - PIPE HOOK
 - NIPPLES
 - ELBOWS
 - VANDAL RESISTANT KIT
 - HANDLES (CROSS OR WRIST) CIRCLE STYLE
 - OTHER _____

- FEATURES:**
- CONTROL VALVE**
- *ECCENTRICS ADJUST FROM 7-1/2" TO 8-1/2"
 - *INTERNAL SPRING LOADED CHECK VALVES
 - *SWIVELLING SEAT DISKS
 - *HOT SIDE STEM - RIGHT HAND
 - *COLD SIDE STEM - LEFT HAND
 - *STAINLESS STEEL SEATS
 - *STAINLESS STEEL SEAT SCREWS
 - *STAINLESS STEEL HANDLE SCREWS

- HOSE**
- *60" LENGTH
 - *STAINLESS STEEL END FITTINGS
 - *STAINLESS STEEL EXTERNAL JACKET
 - *USDA APPROVED FOODGRADE INTERNAL HOSE
 - *REPAIRABLE IN FIELD WITH SIMPLE TOOLS

- POT FILLER VALVE**
- *NON-SCRATCHING / MARRING TUBE
 - *5.0 GPM AT 80 PSI
 - *AERATED STREAM

- SWIVEL ELBOW**
- *360° TURNING RADIUS
 - *ATMOSPHERIC VACUUM BREAKER

- SYSTEM LIMITS**
- *TEMP: 40°F MIN. TO 140°F MAX.
 - *PRESSURE 200 PSI MAX. STATIC

- SHIPPING WEIGHT**
- *10.0 LBS