

APPLICATION:

PRODUCT NAME:
 POT FILLER W/6' HOSE


JOB NAME:

SPECIAL CONFIGURATION
 CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

MODEL:
 5011-6

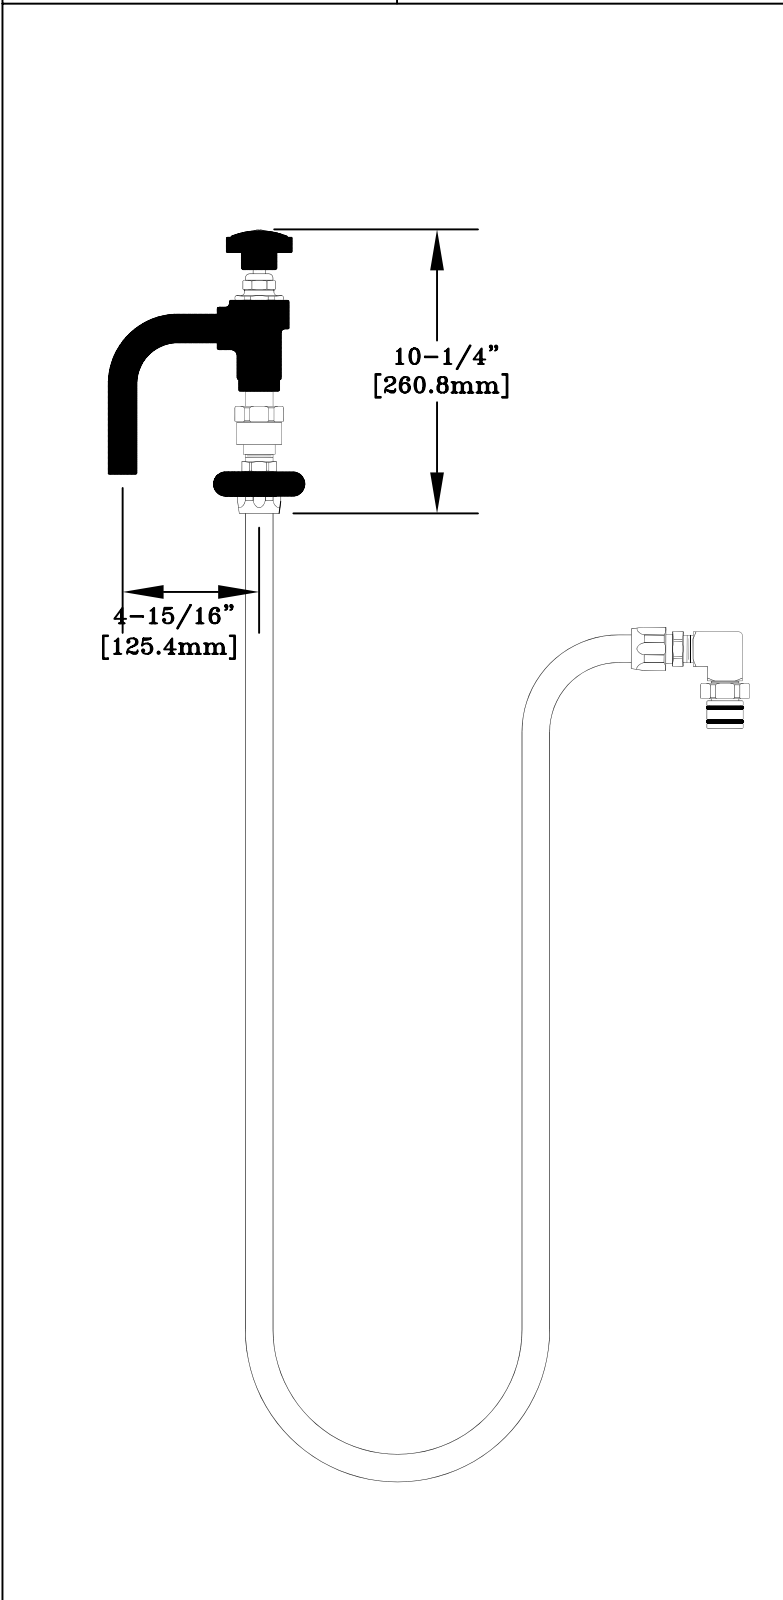

OPTIONS OR MODIFICATIONS:
 SUPPLY LINES (24" OR 36") CIRCLE LENGTH
 NIPPLES
 ELBOWS
 HANDLES (CROSS OR WRIST) CIRCLE STYLE
 VANDAL RESISTANT KIT
 OTHER _____

FEATURES:

- * 360° SWIVEL GOOSENECK HEAD
- * NONMARRING GOOSENECK HEAD
- * SHUT-OFF GOOSENECK HEAD
- * 360° SWIVEL ELBOW

HOSE

- * 72" LG. HEAT MASTER FDA NITRILE/ARAMID
- * NSF-51 (100 PSI W.P. @ 300°F) CONSTANT
- * RENEWABLE END FITTINGS & BUMPER
- * INLET - 360° SWIVEL VACUUM BREAKER
- * OUTLET - 360° SWIVEL SPOUT W/VINYL FINISH

RECOMMENDED SETTINGS

- * 110°F AT 80 PSI

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE 200 PSI MAX. STATIC
- * 29 GPM @ 80 PSI

SHIPPING WEIGHT

- * XX.XX LBS